

### WATER REQUIREMENT

-AT FIELD ELEVATION  
-WITHIN 100' OF FIELD  
-DOWNSTREAM OF BACKFLOW IS  
75 GPM @ 50 PSI

### IRRIGATION LEGEND

- PRODUCT DESCRIPTION**
- HUNTER I-20-04-XX/I-20-06-XX. NOZZLE AS SHOWN
- NOZZLE PERFORMANCE:**
- #3.5 @ 40 PSI - 3.0 GPM 38' RADIUS
  - #8 @ 40 PSI - 4.9 GPM 40' RADIUS
  - #10 @ 40 PSI - 6.0 GPM 41' RADIUS
  - #10 @ 40 PSI - 8.4 GPM 42' RADIUS
- ⊗ HUNTER ICV/IBV ELECTRIC CONTROL VALVE. SIZED AS SHOWN
  - ⊙ HUNTER HQ-44-XX-AW QUICK COUPLER VALVE (OPTIONAL)
  - ⊙ HUNTER IC-1200 SOLID STATE, METAL CABINET, CONTROLLER
  - ⊙ HUNTER SOLAR-SYNC-SEN, ON SITE WEATHER SENSOR
  - ⊙ WATER METER, MINIMUM SIZE @ 75 GPM IS 2.0"
  - ⊙ BACKFLOW PREVENTER SIZED TO SYSTEM GPM
  - MAINLINE PIPE
  - LATERAL PIPE
  - SLEEVING
  - ⊗ ISOLATION VALVE, LINE SIZED

### IRRIGATION NOTES


1. SPRINKLER LOCATIONS ARE TO SCALE
2. PIPE LOCATIONS ARE DIAGRAMMATIC
3. ALL SPRINKLERS TO BE INSTALLED ON .75" SCH 80 SWING JOINTS
4. ALL COMPONENTS TO BE INSTALLED AS PER MANUFACTURERS RECOMMENDATIONS
5. MAINLINE DEPTH TO BE NO LESS THAN 18"
6. LATERAL DEPTH TO BE NO LESS THAN 16"
7. ELECTRIC CONTROL VALVES TO BE COVERED WITH 12" VALVE BOX
8. LOCATE VALVES/QCV'S OUT OF HIGH TRAFFIC AREAS
9. WIRE SPlice CONNECTIONS TO BE WATERPROOF
10. QCV TO BE LOCATED IN 10" VALVE BOX
11. ALL SLEEVES TO BE 2X PIPE RUN THROUGH THEM
12. INSTALL ALL COMPONENTS AS PER LOCAL, STATE, FEDERAL CODES
13. REFER TO HUNTER INSTALLATION DETAILS
14. REFER TO HUNTER CATALOG FOR PERFORMANCE SPECIFICATIONS
15. ADD HUNTER "FS" FOR DIRTY WATER VALVE
16. ADD HUNTER "AS" FOR PRESSURE REGULATED VALVE

### VALVE ID GUIDE

A1	STATION NUMBER	55
1.5"	VALVE SIZE	1.5"
.50"/hr	PRECIPITATION RATE	

### SYSTEM PERFORMANCE DATA

ZONE	SIZE	FLOW	PR	DU	SC (10% WINDOWN)
A1	1"	27	.32"	.79	1.5
A2	1.5"	58	.65"	.80	1.2
A3	1.5"	50	.65"	.80	1.2
A4	1.5"	50	.96"	.80	1.2
A5	1.5"	57	.96"	.83	1.2
A6	1.5"	51	.96"	.83	1.2
A7	1.5"	48	.96"	.83	1.2
A8	1.5"	66	.43"	.78	1.2
A9	1.5"	66	.43"	.78	1.2
A10	1.5"	66	.43"	.78	1.2
A11	1.5"	66	.43"	.78	1.2

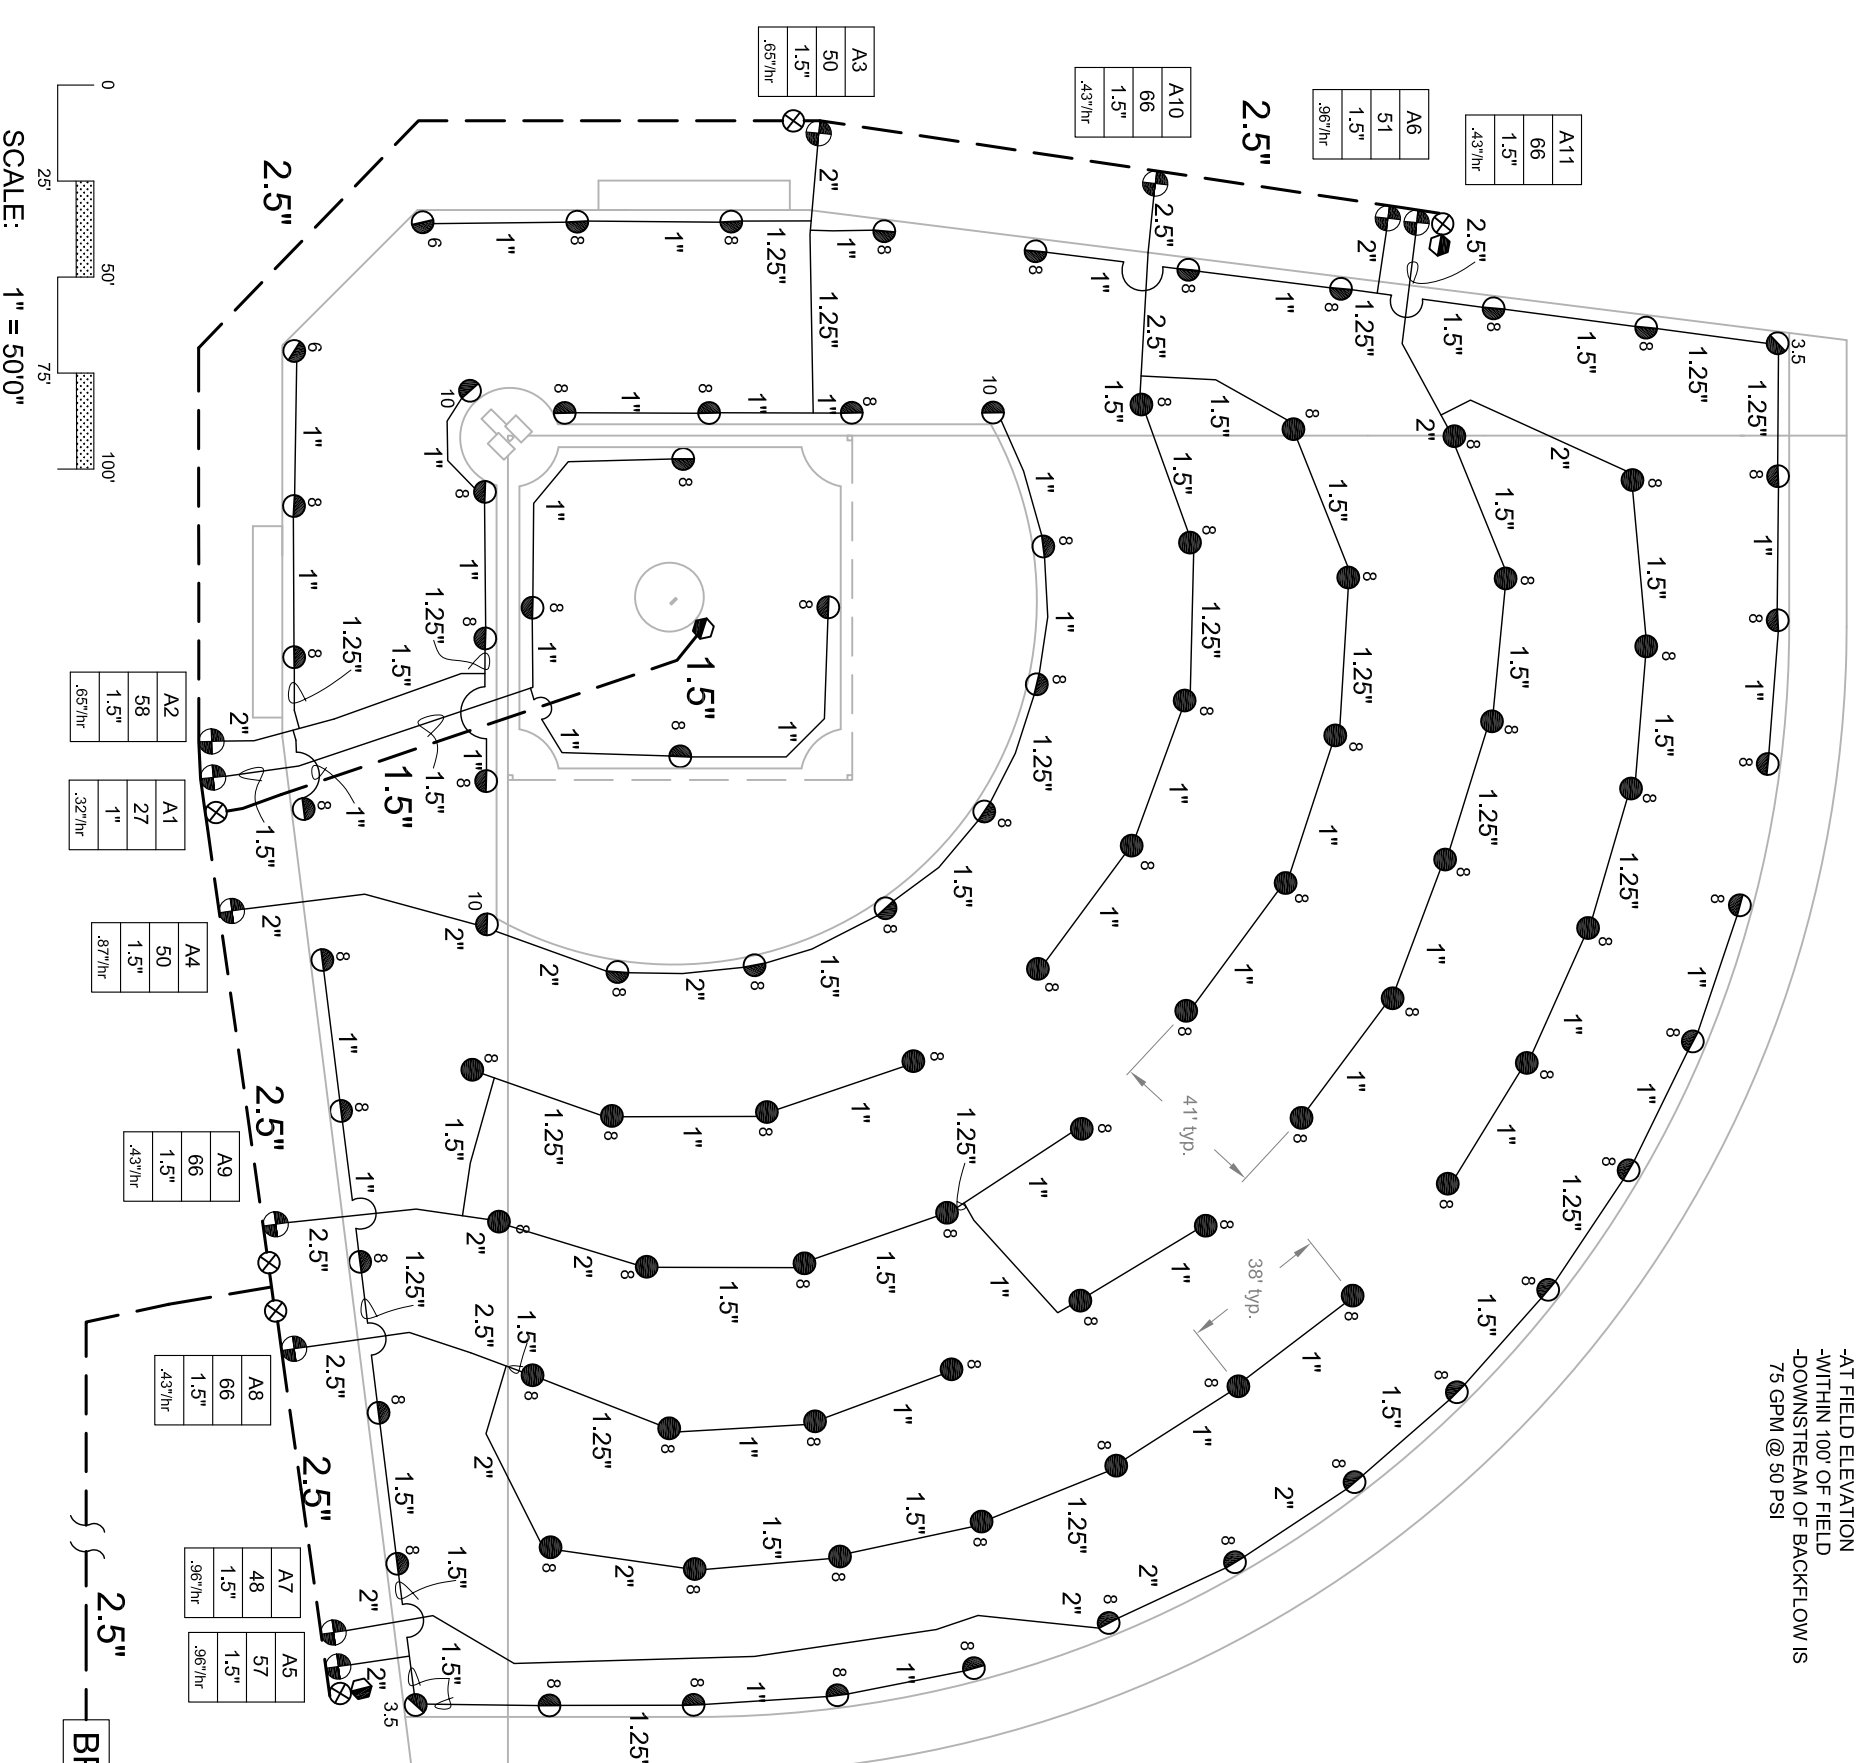

SCALE: 1" = 50'0"



OFFICIAL BASEBALL FIELD  
I-20 SIX ROW DESIGN

Hunter Industries  
1940 Diamond Street  
San Marcos, California 92078  
SpecPro Technical Assistance  
1-800-319-4796  
www.HunterIndustries.com

SHEET  
1 OF 1

Hunter Industries offers this plan as a general guide for estimating purposes and offers no indemnity, expressed or implied, for projects installed from this plan. Because of the many variables of every system and of every site we recommend that a qualified irrigation designer be consulted.