



VALVE IDENTIFICATION GUIDE

| SYMBOL | MANUFACTURER/MODEL/DESCRIPTION | QTY |
|--------|--|------------|
| | Hunter ICV-G 2" 1", 1-1/2", 2", and 3" Plastic Electric Remote Control Valves, Globe Configuration, with NPT Threaded Inlet/Outlet, for Commercial/Municipal Use. | 14 |
| | Watts LF909M1 2" Lead Free Reduced Pressure Backflow Preventer. | 1 |
| | Hunter A2C-75D-SS 75-Station Decoder controller in a stainless steel wall mount enclosure. | 1 |
| | Water Meter 2" | 1 |
| | Irrigation Lateral Line: PVC Class 200 SDR 21 2" | 1,387 l.f. |
| | Irrigation Lateral Line: PVC Class 200 SDR 21 2 1/2" | 555.2 l.f. |
| | Irrigation Lateral Line: PVC Class 200 SDR 21 3" | 895.7 l.f. |
| | Irrigation Lateral Line: PVC Class 200 SDR 21 4" | 529.0 l.f. |
| | Irrigation Mainline: PVC Class 315 SDR 13.5 3" | 144.3 l.f. |
| | Irrigation Mainline: PVC Class 315 SDR 13.5 4" | 221.5 l.f. |
| | Irrigation Mainline: PVC Class 315 SDR 13.5 6" | 190.5 l.f. |



IRRIGATION LEGEND

| SYMBOL | MANUFACTURER/MODEL/DESCRIPTION | QTY | PSI | GPM |
|--------|--|-----|-----|------|
| | Hunter I-50-06-SS Turf Rotor, 6.0" Pop-Up. Adjustable to Full Circle. Drain Check Valve, Stainless Steel Riser, 1" Female NPT Inlet Threads, Standard Nozzle. | 22 | 80 | 27.7 |
| | Hunter I-50-06-SS-ON Turf Rotor, 6.0" Pop-Up. Adjustable to Full Circle. Drain Check Valve, Stainless Steel Riser, 1" Female NPT Inlet Threads, Dual Opposing Nozzle. | 14 | 80 | 30.9 |

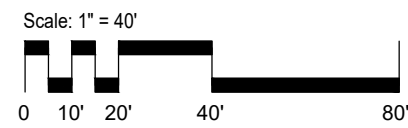

POLOCROSSE FIELD 480x180

I-50 ROTOR
NON-LOOPED MAIN LINE LAYOUT

HUNTER INDUSTRIES
1940 DIAMOND STREET
SAN MARCOS, CALIFORNIA 92078

SHEET
1 of 2

TECHNICAL ASSISTANCE
1-800-319-4796
WWW.HUNTERINDUSTRIES.COM