

## Solenoids

Heavy-duty Hunter 24 VAC or latching solenoids provides dependable operation and long life performance.

### KEY BENEFITS

- Compatible with all Hunter irrigation valves
- Energy-efficient, low-power design
- Engineered with ultra-durable, heavy-duty materials for maximum longevity
- Stops water intrusion and protects critical electrical components
- Pre-wired with 46 cm of valve-control wire
- Captive plunger offers easy servicing of solenoid
- Manual quarter-turn on/off control
- Easy installation with no tools required


### ELECTRICAL SPECIFICATIONS

#### 606800

- Minimum opening/operating voltage: 19 VAC
- Maximum recommended voltage: 28 VAC
- Current at 24 VAC:
  - 350 mA inrush, 190 mA holding, 60 Hz
  - 370 mA inrush, 210 mA holding, 50 Hz
- Maximum operating pressure: 15.17 bar; 1517 kPa
- Wire leads: 45 cm of 0.8 mm<sup>2</sup> UL-approved wire

#### 458200

- Minimum opening/operating voltage: 6 VDC
- Maximum recommended voltage: 9 VDC
- Coil resistance: 4.8 ohms nominal
- Maximum operating pressure: 13.79 bar; 1379 kPa
- Wire leads: 45 cm of 0.8 mm<sup>2</sup> Black and Red UL-approved wire

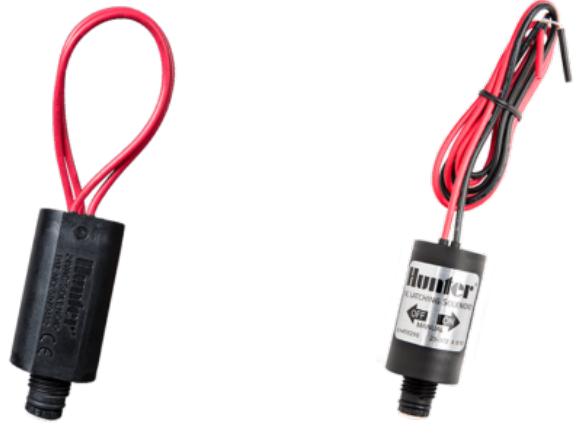

Copyright © 2024 Hunter Industries Inc. Hunter, the Hunter logo, and other marks are trademarks of Hunter Industries Inc., registered in the U.S. and certain other countries.

<https://www.hunterindustries.com/en-metric/irrigation-product/accessories/solenoids>  
071724