


## IBV

Built of solid brass, this valve can power through the fiercest irrigation conditions.

### KEY BENEFITS

- Factory-installed Filter Sentry™ scours the filter screen in dirty water conditions
- External/internal manual bleed allows for quick and easy activation at the valve
- Heavy-duty brass construction provides high pressure rating and reliability
- Double-beaded diaphragm seal design ensures leak-free performance
- Fabric-reinforced EPDM diaphragm and seat ensure greater performance in all water conditions
- Triple-tool bonnet screws are compatible with standard or Phillips screwdrivers as well as a nut driver
- Encapsulated solenoid with captive plunger used on every Hunter valve provides hassle-free service
- Flow control maximises efficiency and prolongs the life of the system

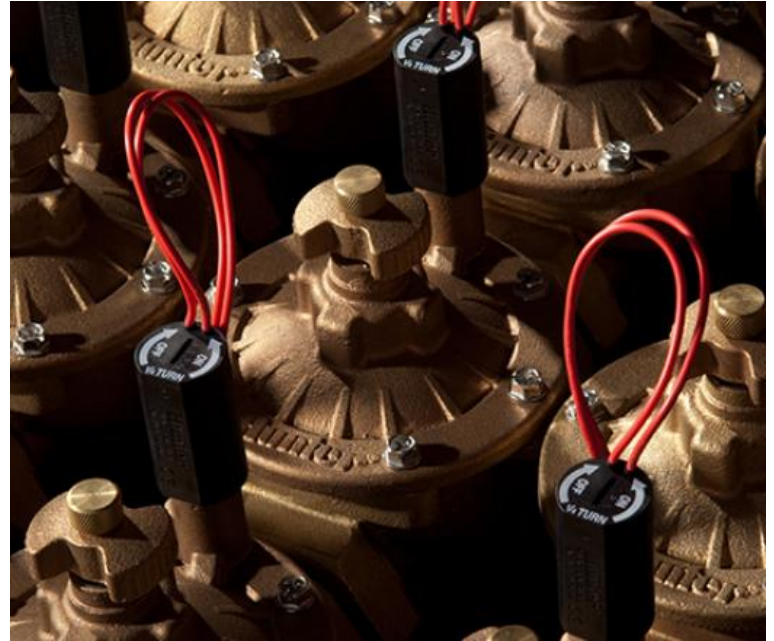

### Operating Specifications

- Flow rate:
  - IBV-101G-FS: 0.03 to 9 m<sup>3</sup>/hr; 0.4 to 150 l/min
  - IBV-151G-FS: 0.03 to 34 m<sup>3</sup>/hr; 0.4 to 568 l/min
  - IBV-201G-FS: 0.03 to 45 m<sup>3</sup>/hr; 0.4 to 757 l/min
  - IBV-301G-FS: 0.03 to 68 m<sup>3</sup>/hr; 0.4 to 1,135 l/min
- Recommended pressure range: 1.5 to 15 bar; 150 to 1500 kPa
- Temperature Range: Up to 66°C
- Warranty period: 5 years

### Solenoid Specifications

- 24 VAC solenoid
  - 350 mA inrush, 190 mA holding, 60 HZ
  - 370 mA inrush, 210 mA holding, 50 HZ

### Factory Installed Options

- DC: DC-latching solenoid for battery-powered controllers

### User Installed Options

- Accu Sync™ pressure regulation at the valve
- DC-latching solenoid for battery-powered controllers (P/N 458200)
- Solenoid conduit cover (P/N 464322)

## IBV PRESSURE LOSS IN BAR

Flow	1"	1½"	2"	3"
m³/hr	Globe	Globe	Globe	Globe
0.05	0.1			
0.1	0.1			
0.3	0.1			
1.0	0.2			
2.5	0.2			
3.5	0.2			
4.5	0.2	0.1		
7.0	0.4	0.1		
9.0	1.0	0.1	0.1	
11.0		0.2	0.1	
13.5		0.2	0.1	
17.0		0.3	0.1	
20.5		0.4	0.2	
23.0		0.5	0.3	
27.0		0.7	0.4	
30.5		0.9	0.5	
34.0		1.2	0.6	0.2
40.0			0.9	0.2
45.5			1.2	0.3
51.0				0.3
57.0				0.4
62.5				0.5
68.0				0.6

<b>IBV PRESSURE LOSS IN KPA</b>				
<b>Flow</b>	<b>1"</b>	<b>1½"</b>	<b>2"</b>	<b>3"</b>
<b>l/min</b>	<b>Globe</b>	<b>Globe</b>	<b>Globe</b>	<b>Globe</b>
1	14			
2	14			
4	14			
20	17			
40	20			
60	20			
75	20	9.6		
115	62	10		
150	139	12	5	
190		15	7	
225		18	9.3	
280		26	14	
340		37	20	
380		46	26	
450		65	36	
510		84	47	
565		104	57	16
660			79	22
750			103	29
850				38
950				47
1050				58
1135				69

Copyright © 2024 Hunter Industries Inc. Hunter, the Hunter logo, and other marks are trademarks of Hunter Industries Inc., registered in the U.S. and certain other countries.

<https://www.hunterindustries.com/en-metric/irrigation-product/valves/ibv>  
071724