


## SRV

The SRV valve has been replaced by the enhanced PGV valve

### KEY BENEFITS

- Application: Residential
- Size: 1"
- Double-beaded diaphragm seal design for superior leak-free performance
- Compatible with Hunter's DC Latching solenoids for use with battery operated controllers
- Captive bonnet bolts provide hassle-free valve maintenance
- Low flow capability allows use of Hunter's micro-irrigation products
- Encapsulated 24 VAC solenoid with captive plunger for hassle-free service
- Temperature rating: 125° F
- Warranty period: 2 years

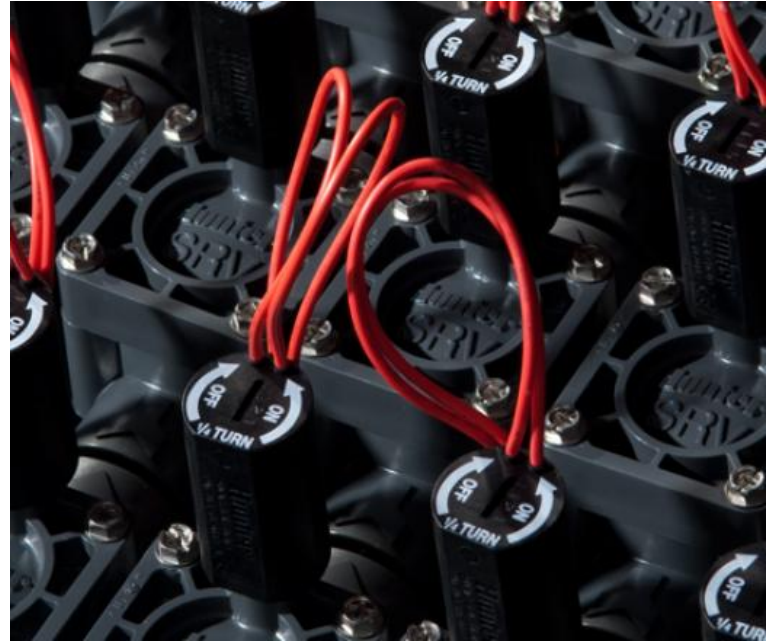

### Operating Specifications

- Flow rate: 1 to 40 GPM
- Recommended pressure range: 20 to 150 PSI

### Solenoid Specifications

- 24 VAC solenoid
  - 350 mA inrush, 190 mA holding, 60 cycles
  - 370 mA inrush, 210 mA holding, 50 cycles

### User Installed Options

- Solenoid conduit cover (P/N 464322)
- DC latching solenoid (P/N 458200)
- Accu-Sync pressure regulator

| <b>SRV PRESSURE LOSS IN PSI</b> |              |
|---------------------------------|--------------|
| <b>Flow</b>                     | <b>1"</b>    |
| <b>GPM</b>                      | <b>Globe</b> |
| 1                               | 1.1          |
| 5                               | 1.9          |
| 10                              | 1.9          |
| 15                              | 1.6          |
| 20                              | 5.0          |
| 30                              | 9.1          |
| 35                              | 16           |
| 40                              | 20           |
|                                 |              |

Copyright © 2024 Hunter Industries Inc. Hunter, the Hunter logo, and other marks are trademarks of Hunter Industries Inc., registered in the U.S. and certain other countries.

<https://www.hunterindustries.com/irrigation-product/discontinued-models/srv>  
071724